

## Cambridge Rollers

- ✓ CAST IRON WHEELS Ø 500 MM
- ✓ SELF-CLEANING EFFECT
- ✓ PERFORMANCE, RELIABILITY



### **Basic Technical Characteristics of the Machine:**

- ✓ Sufficient processing after sowing
- ✓ Restoration of soil capillarity
- ✓ Increase in the regularity of sowing, vegetation acceleration
- ✓ Disintegration of clods
- ✓ Surface levelling



Easy aggregation with the tractor



Control using a single piston-rod

### **Robust Frame**

- ✓ High-strength refined materials used for crucial nodes to ensure long service life

## Easy Operation

- ✓ No setting necessary
- ✓ Minimum number of lubrication spots



Small transportation dimensions, easy transportability



Storage spot for signs during work

## Technical Parameters

PARAMETERS		CV6	CV9
Working width (mm)		6 000	9 000
Transport width (mm)		2 400	2 300
Transport height (mm)		1 800	1 600
Total length of the machine (mm)		6 220	9 360
Number of segments	Smooth	58	88
	Toothed	55	83
Working capacity (ha/h)		6	9
Pulling vehicle (kW/HP)*		75 / 100*	90 / 125*
Working speed (km/h)		8-14	8-14
Maximum transport speed (km/h) <sup>1)</sup>		15	15
Maximum climbing ability (°)		11	11
Tyre dimensions - transport		10.0/75-15.3	10.0/75-15.3
Number of hydraulic circuits / pressure (bar)		1 / 200	1 / 200
Number of quick-coupling devices / type		2 / ISO 12.5	2 / ISO 12.5
Tractor hitch requirement		Bottom hitch	Bottom hitch
Machine weight (kg)		2700	3600

\* recommended pulling vehicle, the actual pulling force may significantly change according to the selected version of the machine, processing depth, soil conditions, inclination of land, wear and tear of the working parts and their adjustment

### Technical Advice!

<sup>1)</sup> **Transport/Brake System:** Follow the national regulations valid for transportation of machines on public roads. Check the legal provisions valid in the country and regulations on maximum permissible total axle weights and loads and also on the necessary potential use of a brake system. If you have any further questions, please contact our sales representative.




Smooth cast iron wheel



Toothed cast iron wheel

### **Hitch**

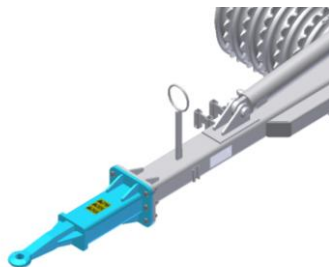




Hitch eye  $\varnothing$ 40mm

### **Optional Equipment**



Light set

## **eXtra STEEL line®**

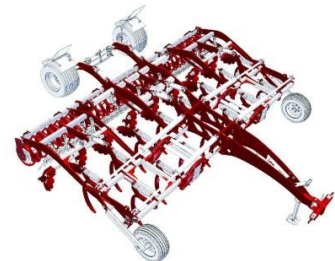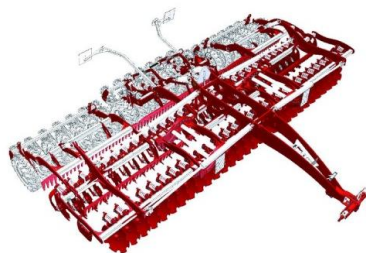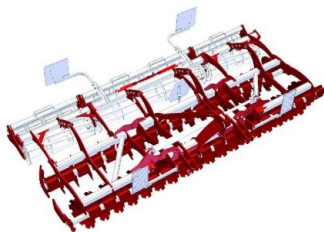

**More information at [www.farmet.cz](http://www.farmet.cz)**

Valid from 1 June 2013; changes reserved.